MIDMARK®

Installation Instructions

002-0632-00 Knee Crutch Handle Replacement Kit
Used On: 9A101005 thru 0XX, 9A14000X, 9A14400X, 9A14700X 9A20600X, 9A20700X, 9A20800X, and 9A20900X Knee Crutches

KIT COMPONENTS

Part Number	Description	Qty.
053-0114-00	Bearing Flange - Nylon	1
042-0189-00	Milled Stud	1
057-0539-00	Stud Insertion Rod	1
016-0826-00	Adjustable Handle	1
003-1054-00	I / O Instructions	1

REQUIRED TOOLS

None.

INTRODUCTION

To provide a more durable clamping mechanism for knee crutch assemblies.

INSTALLATION (1)

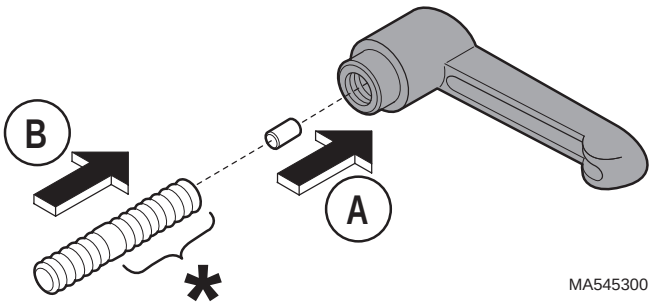

A. Insert insertion rod into threaded hole of adjustable handle.

EQUIPMENT ALERT

The milled stud must be oriented correctly. Make sure the ***long***(*) end of the milled stud is screwed into the adjustable handle.

B. Screw ***long***(*) end of milled stud into threaded hole until it bottoms out on insertion rod.

INSTALLATION (2)

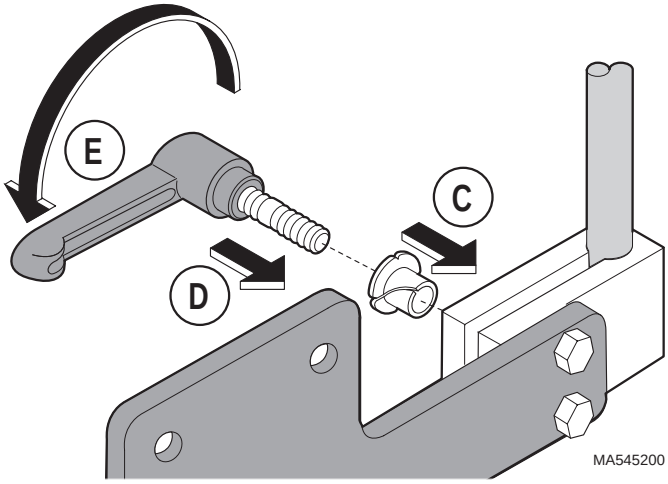

C. Install nylon flange bearing on clamp, making sure it is fully seated into shoulder of hole.

D. Insert assembled adjustable handle into clamp.

E. Screw adjustable handle in until milled stud bottoms out against bracket.

INSTALLATION (3)

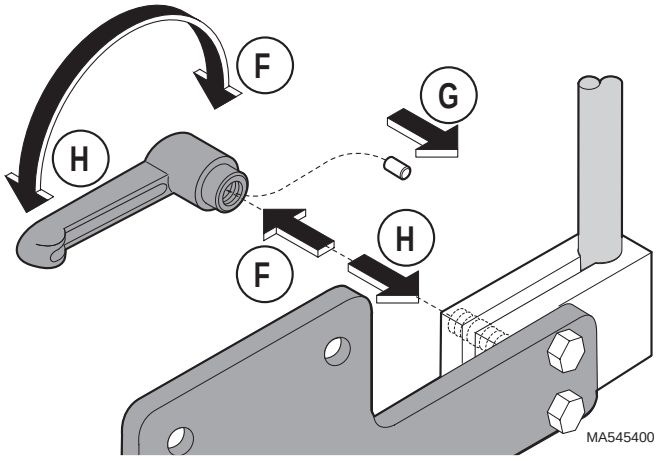

F. Unscrew adjustable handle from milled stud.

G. Remove insertion rod from adjustable handle and discard.

H. Screw adjustable handle back onto clamp; the clamp and adjustable handle are now ready for use.

MIDMARK®

Midmark Corporation, Versailles, Ohio 45380 U.S.A.
(937) 526-3662 FAX (937) 526-5542

003-1054-00 Rev. A1 (12/99)

© Midmark Corporation - 1999